

Represented by:

DFT[®] INC



DFT[®] INC


140 Sheree Blvd.
P.O. Box 566
Exton, PA 19341-0566

800-206-4013

610-363-8903

email: dft@dft-valves.com
<http://www.dft-valves.com>
FAX: 610-524-9242

Printed in the USA 05/28/02 - Rev. 1
Copyright 2002, DFT[®] Inc., All Rights Reserved

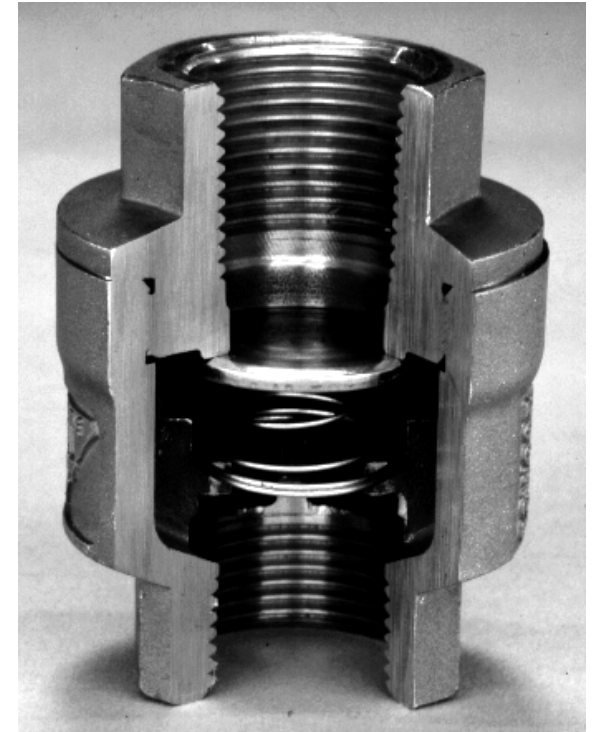

SCV

In-Line

Alloy 20

Check Valve

FEATURES

- Alloy 20 Body, disc & seat
- Hastelloy Spring
- 750 CWP
- 1/2" TO 3" In-Line Check Valve
- NPT & SW
- Metal seats
- Edge guided
- Easy to maintain
- Prevents water hammer & flow reversal
- Horizontal/Vertical Installation

SCV

APPLICATIONS



OPTIONS

- 316 SS, Hastelloy C, and other body materials
- Soft seats for bubble tight shutoff to 470° F.
- Oxygen cleaning
- Seal welded body

(High Amine Concentration)

Sulfuric Acid

(Water Treatment)

DFT[®] INC